


P23A

Led 19*4in1 zoom par

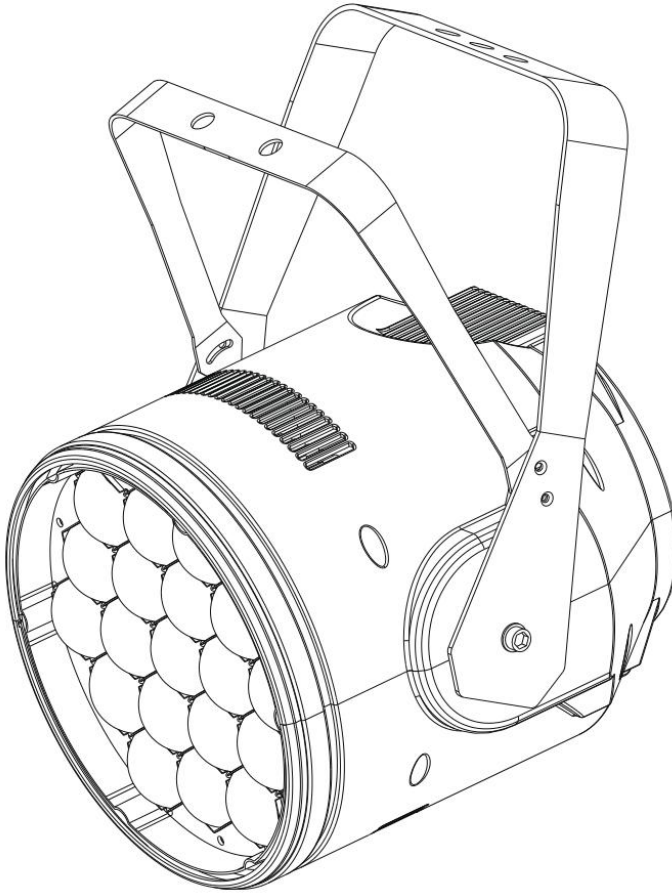

User manual

Please read the instructions carefully before use

TABLE OF CONTENTS

1. Safety Instructions.....	2
2. Technical Specifications.....	4
3. How To Control The Unit.....	5
4. SHAPE.....	9
5. Trouble shooting.....	10
6. Fixture Cleaning.....	11

statement

The product has well capability and intact packing when leave factory. All of the user should comply with warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can not be responsible for any malfunction & problem owing to ignore the manual.

1. Safety Instructions

Please keep this User Guide for future consultation. If you sell the unit to another user, be sure that they also receive this instruction booklet.

- ☐ Unpack and check carefully there is no transportation damage before using the unit.
- ☐ Before operating, ensure that the voltage and frequency of power supply match the power requirements of the unit.
- ☐ It's important to ground the yellow/green conductor to earth in order to avoid electric shock.

- ⚠ The unit is for indoor use only. Use only in a dry location.
- ⚠ The unit must be installed in a location with adequate ventilation, at least 50cm from adjacent surfaces. Be sure that no ventilation slots are blocked.
- ⚠ Disconnect main power before replacement or servicing.
- ⚠ Make sure there are no flammable materials close to the unit while operating as it is fire hazard.
- ⚠ Use safety cable when fixes this unit. DO NOT handle the unit by taking its head only, but always by taking its base.
- ⚠ Maximum ambient temperature is T_a : 40°C. DO NOT operate it where the temperature is higher than this Unit surface temperature may reach up to 85°C. DO NOT touch the housing bare-hand during its operation. Turn off the power and allow about 15 minutes for the unit to cool down before replacing or serving.
- ⚠ In the event of serious operating problem, stop using the unit immediately. Never try to repair the unit by yourself. Repairs carried out by unskilled people can lead to damage or malfunction. Please contact the nearest authorized technical assistance center. Always use the same type spare parts.
- ⚠ DO NOT touch any wire during operation as high voltage might be causing electric shock.

Warning:

- ⚠ To prevent or reduce the risk of electrical shock or fire, do not expose the unit to rain or moisture.
- ⚠ DO NOT open the unit within five minutes after switching off.
- ⚠ The housing, the lenses, or the ultraviolet filter must be replaced if they are visibly damaged.

Caution:

There are no user serviceable parts inside the unit. DO NOT open the housing or attempt any repairs yourself. In the unlikely event your unit may require service, please contact your nearest dealer.

Installation:

The unit should be mounted via its screw holes on the bracket. Always ensure that the unit is firmly fixed to avoid vibration and slipping while operating. And make sure that the structure to which you are attaching the unit is secure and is able to support a weight of 10 times of the unit's weight. Also always use a safety cable that can hold 12 times of the weight of the unit when installing the fixture.

The equipment must be fixed by professionals. And it must be fixed at a place where is out of the touch of people and has no one pass by or under it.

2. Technical Specifications

Light Sources: led 19*4in1 15w

Power Consumption: 285W

Zoom angel:7-60 degree

Power Voltage: AC100-240V, 50/60Hz

Dimension:340x270x400cm

Packing Dimension:425x330x345mm

Net Weight: 6.22kg

Gross Weight:7.9kg

Control

DMX Channel: 9 Channel

Control Modes: DMX512

Construction

Display: Digital Display Panel


Data In/Out socket: 3-pin

Protection Rating: IP20

3.Lux Date

Min Zoom range =7°

Max Zoom range =60°

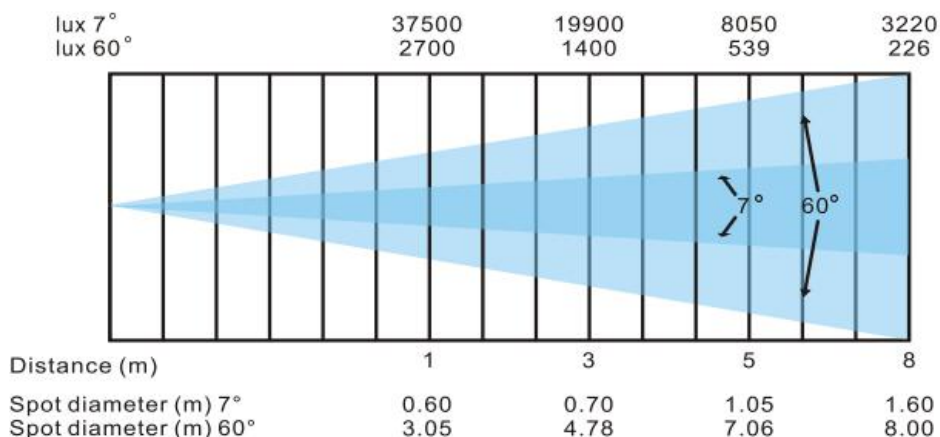

4. How To Control The Unit

The DMX512 is widely used in intelligent lighting control, with a DMX 512 controller. connect several lights together, dmx in and dmx out,

3 pin XLR connectors: Pin 1: GND, Pin 2: Negative signal (-), Pin 3: Positive signal (+)


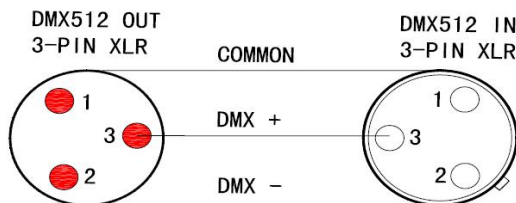


Figure2

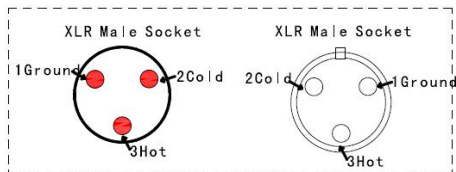

XLR Pin Configuration	
pin1=	Ground
pin2=	Data Compliment (negative)
pin3=	Data true (positive)

Display:

- MENU** To select the programming functions
DOWN To go backward in the selected functions
UP To go forward in the selected functions
ENTER To confirm the selected functions

Set DMX Address Code

- 1 Press **"Menu"** to "Set DMX Address", and press **"ENTER"** keys to enter into
- 2 Show "Set DMX Address DMX Address:001", Press the **"UP and DOWN"** keys to amended
- 3 Press **"ENTER"** keys to save and Exit, Press the **"MENU"** Keys does not save and Exit



Menu



Up



Down



Enter


function	Set Dmx Address	A001~AXXX	Change address
	Value Display	Red.....	Show each channel value
	Set To Slave	Slave	Slave receive position select
	Auto Program	Master / Alone	auto run mode
	Music Control	Master / Alone	Sound auto run



inform	Temp Inf	Head Temperature	XXX°C/°F	current temperature
	Soft Inf	V1.0.....		software version
Person	Status settings	Mic Sensitivity	0~99%	
	Reset Default	ON/OFF		Re-load all factory's original parameter
	Reset Default	ON/OFF		
Reset	Reset All			Reset the light
Effect Adjust	Test Channel	Auto: Red: Green:	Auto:	Channel test :
	Stati Control	Auto: Red: Green:	Auto =XXX Red =XXX Green =XXX	Manually adjust all channels value

DMX channel's functions and their values (9 DMX channels):		
Mode/Channel	Value	Function
1		<u>Red LED :</u>
	0-255	Red (0-Black , 255-100% Red)
2		<u>Green LED :</u>
	0-255	Green (0-Black , 255-100% Green)
3		<u>Blue LED :</u>
	0-255	Blue (0-Black , 255-100% Blue)
4		<u>White LED :</u>
	0-255	White (0-Black , 255-100% White)
5		<u>Shutter, strobe:</u>
	0-31	Led turn off
	32-63	Led turn on
	64-95	Strobe effect slow to fast

	96-127	Led turn on
	128-159	Pulse-effect in sequences
	160-191	Led turn on
	192-223	Random strobe effect slow to fast
	224-255	Led turn on
6		<u>Dimmer intensity:</u>
	0-255	Intensity 0 to 100%
7		<u>Rainbow:</u>
	0-9	No function
	10-127	Crossfading colors from slow to fast
	128-255	Jumping colors from slow to fast
8		<u>Zoom :</u>
	0-255	Zoom adjustment
9		<u>Lamp on/off, reset, internal programs:</u>
	0-79	Normal
	80-99	Zoom Motor Reset
	100-119	Internal program 1 (secne1~8 of EEPROM)
	120-139	Internal program 2 (secne9~16 of EEPROM)
	140-159	Internal program 3 (secne17~24 of EEPROM)
	160-179	Internal program 4 (secne25~32 of EEPROM)
	180-199	Internal program 5 (secne33~40 of EEPROM)
	200-219	Internal program 6 (secne41~48 of EEPROM)
	220-239	Internal program 7 (secne49~56 of EEPROM)
	240-255	Music Control (secne of Program 1)

5. SHAPE

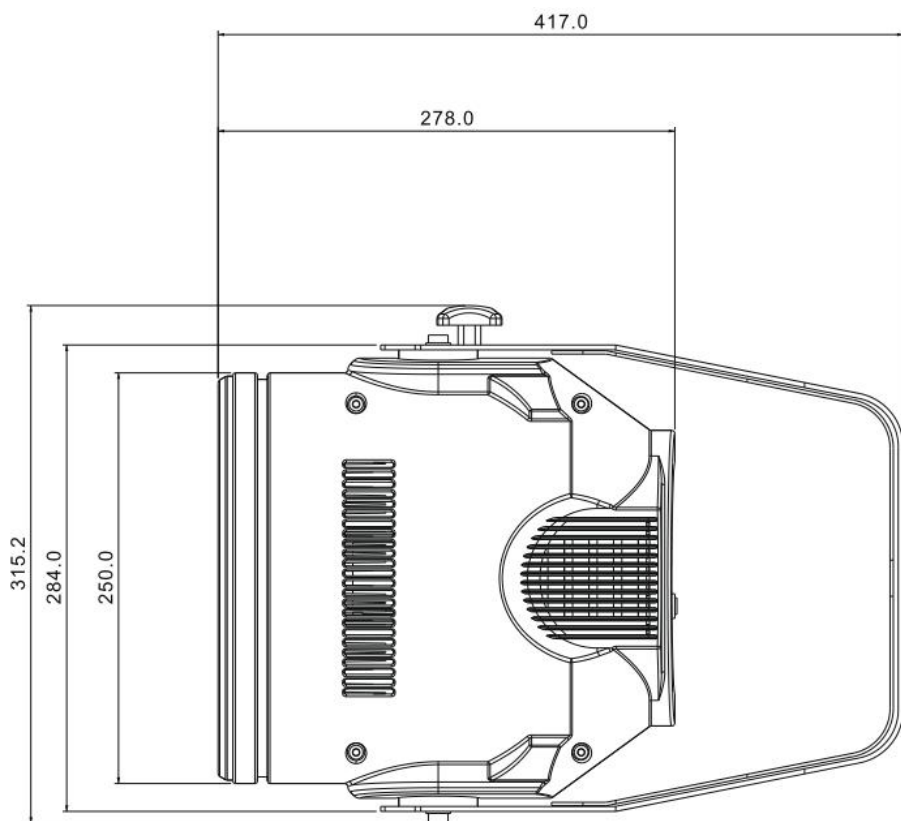

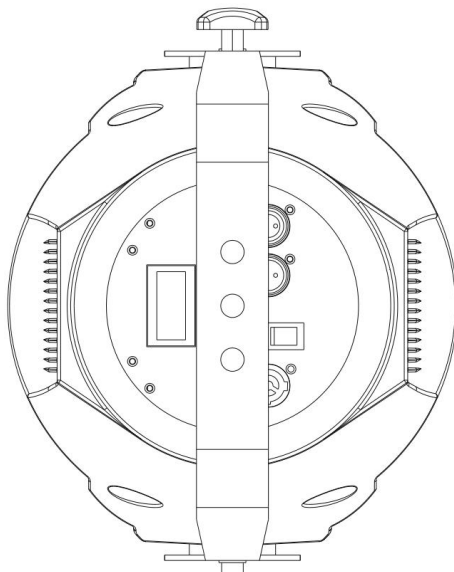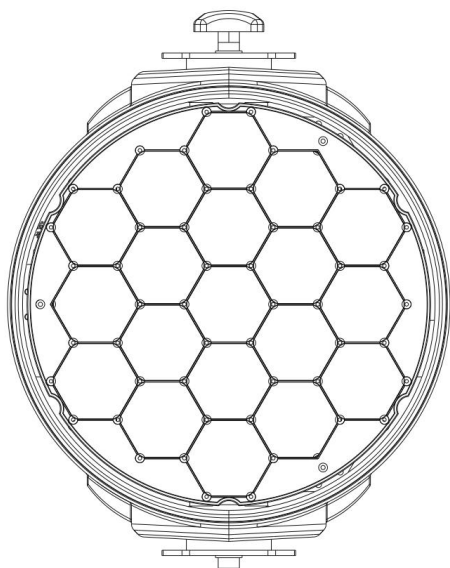

6. Trouble shooting

Following are a few common problems that may occur during operation. Here are some suggestions for easy troubleshooting:

A. The unit does not work, no light and the fan does not work

1. Check the connection of power and main fuse.
2. Measure the mains voltage on the main connector.
3. Check the power on LED.

B. Not responding to DMX controller

1. DMX LED should be on. If not, check DMX connectors, cables to see if link properly.
2. If the DMX LED is on and no response to the channel, check the address

settings and DMX polarity.

3. If you have intermittent DMX signal problems, check the pins on connectors or on PCB of the unit or the previous one.
4. Try to use another DMX controller.
5. Check if the DMX cables run near or run alongside to high voltage cables that may cause damage or interference to DMX interface circuit.

C. One of the channels is not working well

1. The stepper motor might be damaged or the cable connected to the PCB is broken.
2. The motor's drive IC on the PCB might be out of condition.

7. Fixture Cleaning

The cleaning of internal and external optical lenses and/or mirrors must be carried out periodically to optimize light output. Cleaning frequency depends on the environment in which the fixture operates: damp, smoky or particularly dirty surrounding can cause greater accumulation of dirt on the unit's optics.

- **Clean with soft cloth using normal glass cleaning fluid.**
- **Always dry the parts carefully.**
- **Clean the external optics at least every 20 days. Clean the internal optics at least every 30/60 days.**